







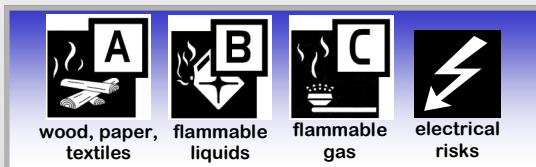




-  Accredited to EN3 & BSI Kitemarked
-  Manufacturer's 5 year warranty
-  Stored pressure - Easy low cost maintenance
-  Safe for use on electrical equipment
-  Suitable for A,B & C class fires
-  Brass valve - Easy to read pressure gauge
-  Controlled discharge
-  Powder coated, steel wire bracket



Meets the recommendations of the Royal Yachting Association and the requirements of the environmental Authority / British Waterways Board Joint Boat Safety Scheme.

Ideal for use in vehicles, caravans, boats, agricultural machinery, farms, garages, in the home, offices, and for a wide range of industrial and commercial applications.

Refilling/Serviceing: Should be carried out annually to BS 5306 Part 3, 2009. After complete or partial use the extinguisher should be refilled to BS 6643 Part 1, 1985. Both refilling and servicing to be carried out by a competent person. Spares available on request.

Model	FBP1K
Capacity	1 kg
Total Weight	2.12 kg
Total Height	330 mm
Total Width (including bracket)	120 mm
Working Temp.	-30 <sup>o</sup> to +60 <sup>o</sup> C
Discharge Time	7 secs
Discharge Range	4 m
Operating Pressure	12 bar @ 20 <sup>o</sup> C
Minimum Burst Pressure	55 bar
Packing Specification	
Qty Per Carton	1
Carton Dimensions	35x10x10 cm
Carton Volume	0.0035 m <sup>3</sup>
Carton Weight	2.1 kg
Qty Extinguishers per Pallet	338 (338 Cartons)
Pallet Dimensions	120x100x140 cm
Pallet Volume	1.68 m <sup>3</sup>
Pallet Gross Weight	730 kg

