

## PRODUCT DATA SHEET

## Sikaflex®-291i

Multifunctional adhesive sealant for marine applications

## TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base		1-component polyurethane
Colour (CQP001-1)		White, black,
Cure mechanism		Moisture-curing
Density (uncured)	depending on colour	1.3 kg/l
Non-sag properties		Good
Application temperature	ambient	10 – 40 °C
Skin time (CQP019-1)		60 minutes <sup>A</sup>
Open time (CQP526-1)		45 minutes <sup>A</sup>
Curing speed (CQP049-1)		(see diagram)
Shrinkage (CQP014-1)		2 %
Shore A hardness (CQP023-1 / ISO 7619-1)		40
Tensile strength (CQP036-1 / ISO 527)		1.8 MPa
Elongation at break (CQP036-1 / ISO 527)		700 %
Tear propagation resistance (CQP045-1 / ISO 34)		7 N/mm
Service temperature (CQP513-1)		-50 – 90 °C
	4 hours	120 °C
	1 hour	140 °C
Shelf life (CQP016-1)		12 months <sup>B</sup>

CQP = Corporate Quality Procedure

<sup>A</sup>) 23 °C / 50 % r. h.<sup>B</sup>) (storage below 25 °C)

## DESCRIPTION

Sikaflex®-291i is a non-sag 1-component polyurethane sealant specifically developed for the marine market, which cures on exposure to atmospheric moisture.

Sikaflex®-291i meets in addition the low spread of flame requirements set out by the International Maritime Organisation (IMO).

## PRODUCT BENEFITS

- Wheelmark approved
- 1-component formulation
- Highly elastic
- Low odour
- Non-corrosive
- Can be painted
- Bonds well to a wide variety of marine substrates
- Solvent free
- Very low VOC
- Low isocyanate content

## AREAS OF APPLICATION

Sikaflex®-291i is a multipurpose product used in marine constructions. It is suitable for making elastic, vibration-resistant joint seals, and can also be used for a variety of interior sealing applications. Sikaflex®-291i bonds extremely well to the materials commonly used in marine construction like wood, metals, metal primers and paint coatings (2-C systems), ceramic materials and plastics (GRP, etc.). Sikaflex®-291i must not be used to seal plastics that are prone to stress cracking (e.g. PMMA, PC, etc.).

This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

## PRODUCT DATA SHEET

Sikaflex®-291i

Version 02.02 (11 - 2019), en\_GB

012001202914001100

## CURE MECHANISM

Sikaflex®-291i cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

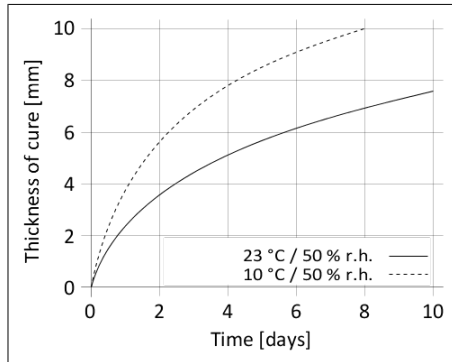


Diagram 1: Curing speed for Sikaflex®-291i

## CHEMICAL RESISTANCE

Sikaflex®-291i is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-Treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

### Application

Sikaflex®-291i can be processed between 10 °C and 40 °C but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and adhesive sealant is between 15 °C and 25 °C. Sikaflex®-291i can be processed with hand, pneumatic or electric driven piston guns.

## Tooling and finishing

Tooling and finishing must be carried out within the skin time of the sealant. It is recommended using Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility prior the use.

## Removal

Uncured Sikaflex®-291i can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using Sika® Cleaner-350H cleaning towels or a suitable industrial hand cleaner and water. Do not use solvents on skin!

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika® Pre-treatment Chart  
For Marine Applications
- General Guidelines  
Bonding and Sealing with Sikaflex® and SikaTack®

## PACKAGING INFORMATION

Mini Unipack	70 ml
Cartridge	300 ml
Unipack	400 ml

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

## PRODUCT DATA SHEET

Sikaflex®-291i  
Version 02.02 (11 - 2019), en\_GB  
012001202914001100

## SIKA LIMITED

Watchmead  
Welwyn Garden City  
Hertfordshire, AL7 1BQ  
Tel: 01707 394444  
Web: www.sika.co.uk  
Twitter: @SikaLimited

